


Information Needed To Order HydraTite Joint Seals

- Measure the inside diameter of the pipe at or near each joint to be sealed
 - It is suggested that two measurements be taken at points 180° to each other to determine if pipe is out of round (12 & 6 O'Clock and 3 & 9 O'Clock) Additional "X" measurements are suggested if pipe appears out of round or oval.



- Note any open or separated joints
 - Measure and note the width of any gap at each joint
 - Note the location of the open joint using clock positions
- Note any offsets at each joint
 - Measure the amount of displacement at the offset
 - Note the location of the offset using clock positions
- Note any significant cracks or defects near each joint

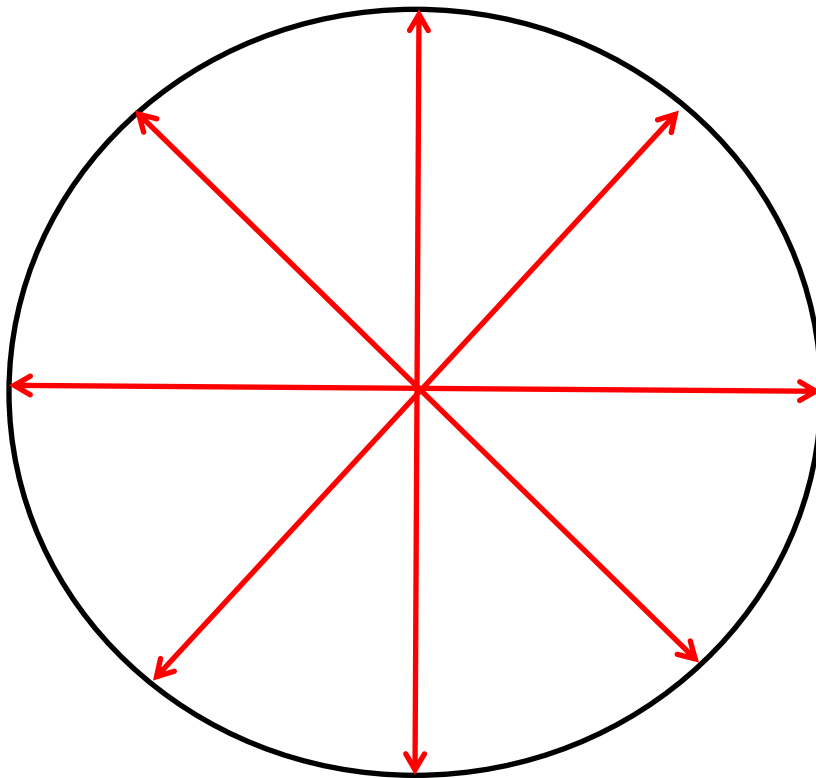